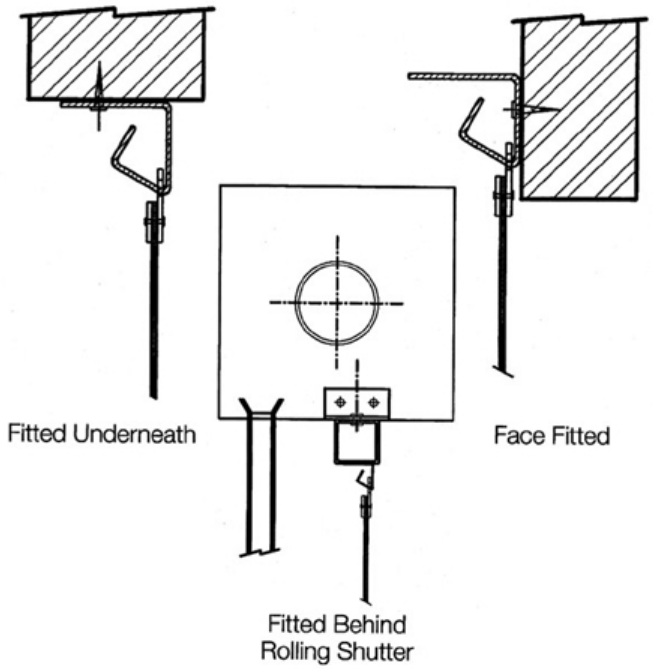

Applications

Strips are suspended from heavy gauge stainless steel rails and plates that can be mounted to the face of the soffit. Strip curtains can be installed behind most types of industrial doors using a horizontal angle or box section with supporting brackets.

Structure of the opening must be adequate to restrain the weight of the strips.

Typical weights:

1200 x 2m 0.5 kg per metre

300 x 3m 1kg per metre

400 x 4m 2 kg per metre

TECHNICAL SPECIFICATIONS

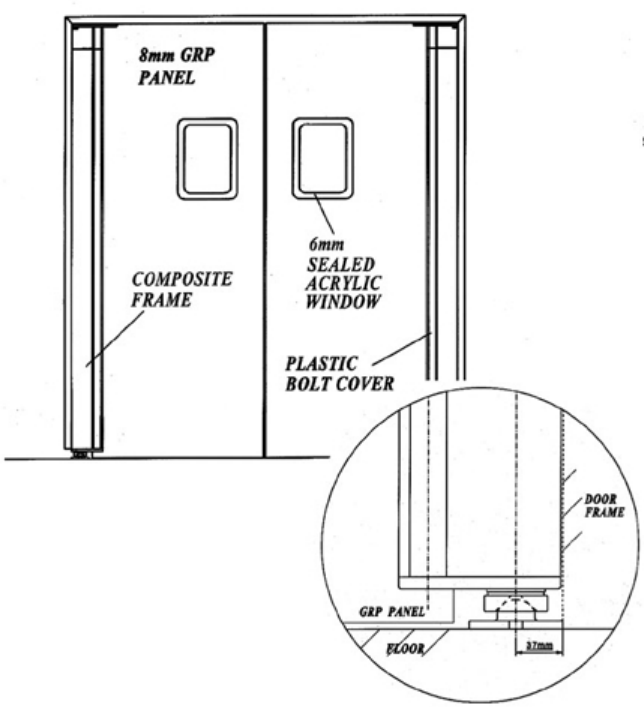
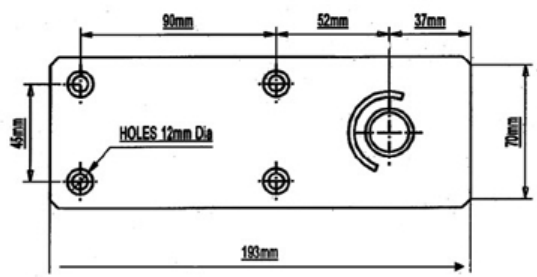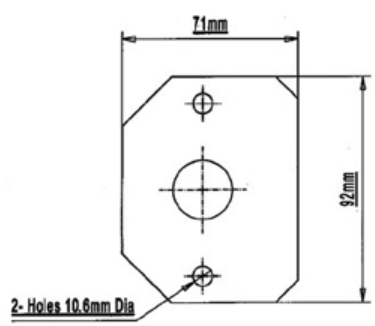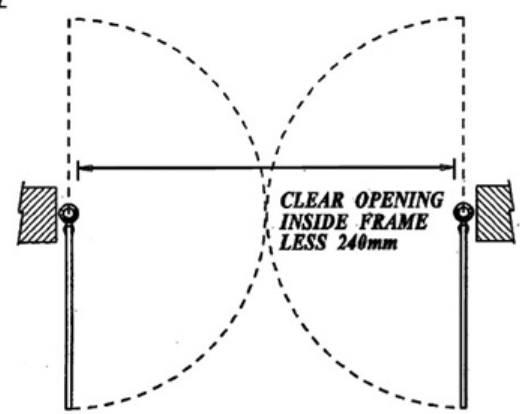
APPLICATIONS